

Applications

The Model BSIL-P6/P9 is designed to measure total pressure in earth fills and embankments, it provides a direct means of measuring total pressures, i.e. the combination of effective soil stress and pore water pressure, such as bridge abutments, diaphragm walls, fills and embankments, retaining walls surfaces, sheet piling, slurry walls and tunnel linings.

Description

The Model BSIL-P6 consists of two circular stainless steel plates, welded around their periphery, with a narrow cavity filled with de-aired oil. Changing earth pressure squeezes the plates together causing a corresponding increase of oil pressure, which is measured by a vibrating wire pressure transducer connected via a short length of steel tubing.

The Model BSIL-P9 has an extra-thick back plate to minimize point loading effects when installed on concrete or rock surfaces.

Key Features

- ♦ Accurate, long-term stability
- ♦ Robust design and reliable
- ♦ Fit for manual or remote reading
- ♦ Integral thermistor
- ♦ Over-voltage surge arrestor protects against electrical damage



Comprehensive information about this product and our full range is available at www.bsil.com.cn

If you would prefer to speak with someone directly, please call +86-10-63780922 or email info@bsil.com.cn

Main Specifications


Model	BSIL-P6	BSIL-P9
Range (MPa)	0.35/0.5/0.7/1.0/2.0/3.0/5.0	
Resolution	0.025% F.S.	
Accuracy	±0.1% F.S.	
Temperature range	-20 to +80°C	
Over-range capacity	50% F.S.	
Dimensions	Dia. 230mm	

Operation

The Vibrating Wire Pressure Cell is used to measure total pressure, particularly in earth or rockfill structures.


The Model BSIL-P6 Pressure Cell is constructed from two thin pressure sensitive plates. They can be positioned in the fill at different orientations so that soil pressures can be measured in two or three directions. Special armored cables are recommended in earth dam applications.

The Model BSIL-P9 Pressure Cell is designed to measure soil pressures on structures. The back plate of the cell which bears against the external surface of the structure is thick enough to prevent the cell from warping. The other plate is thin and is

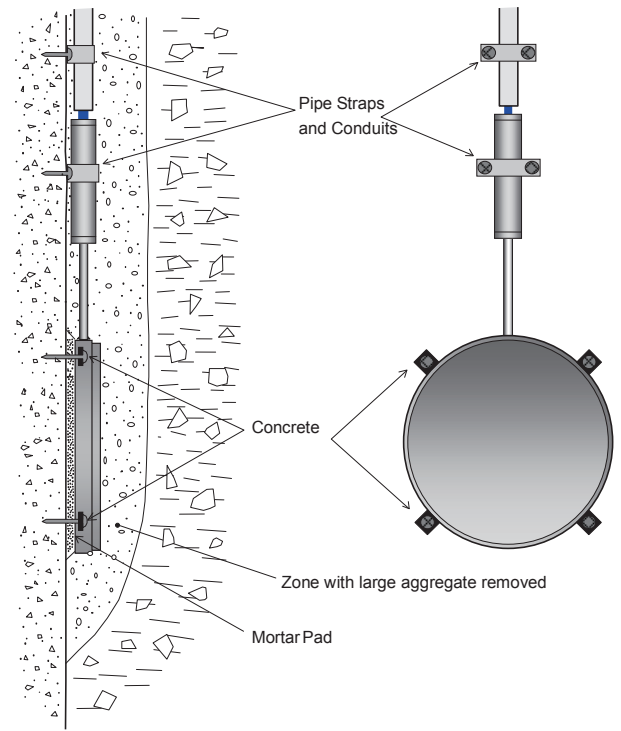


welded to the back plate in a manner which creates a flexible hinge to provide maximum sensitivity of changing soil pressures.

The change in pressure is converted by the VW transducer into an electrical signal and may be remotely read using a VW readout or datalogger.

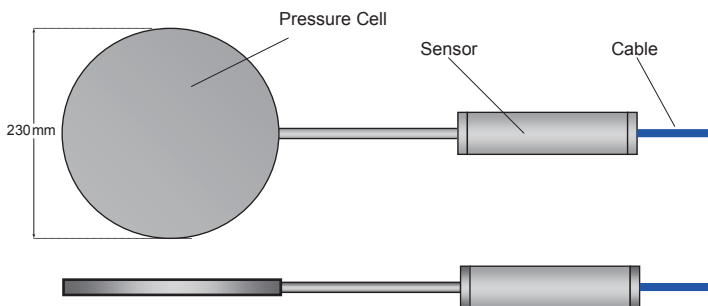

Model BSIL-P6 Pressure Cell

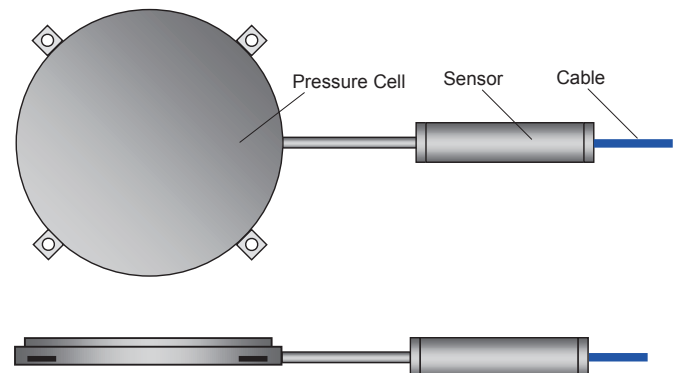

Model BSIL-P9 Pressure Cell



International
Geotechnical
Instrumentation
Specialists

Beijing Soil Instruments Limited
Add: Rm. 302, No. 9 HangFeng Road,
Science & Technology Zone
Fengtai 100071 Beijing, China

Phone: +86-10-63780922
Fax: +86-10-63780622
Http://www.bsil.com.cn
Email: info@bsil.com.cn

